



Description :

Batafiaflex are extremely versatile flexible ductwork suitable for all high and low velocity air-conditioning and ventilation system. It's from state of the art Japanese technology. We produce both pre-insulated and non-insulated forms in a wide range from 4 inches to 20 inches.

Benefits and Features :

Durable :

Batafiaflex is unlike other duct, it give a unique feature that only a foil wraps over the fiberglass and comprises of two concentric Helical Ducts that house the fiberglass wool between them, making it a superior and sturdier product.


Energy Conservation :

Batafiaflex are strong with suitable for all high and low velocity air conditioning ventilation system and fire resistant with a flexibility of being compressed to 10% of this extended length, its come over a spring steel wire helix to give excellent strength and flexibility.

Low Installation Cost :

Batafiaflex are very easy to install at any place, it can be a tight or awkward obstructions in a tight inconvenient place. It's align into smooth profiles and curves unlike rigid ducts that are connected through a series of right angle turns. Installations can be done effectively in minimum time and even unskilled labor can be done.

Core Manufacturing Flow Chart

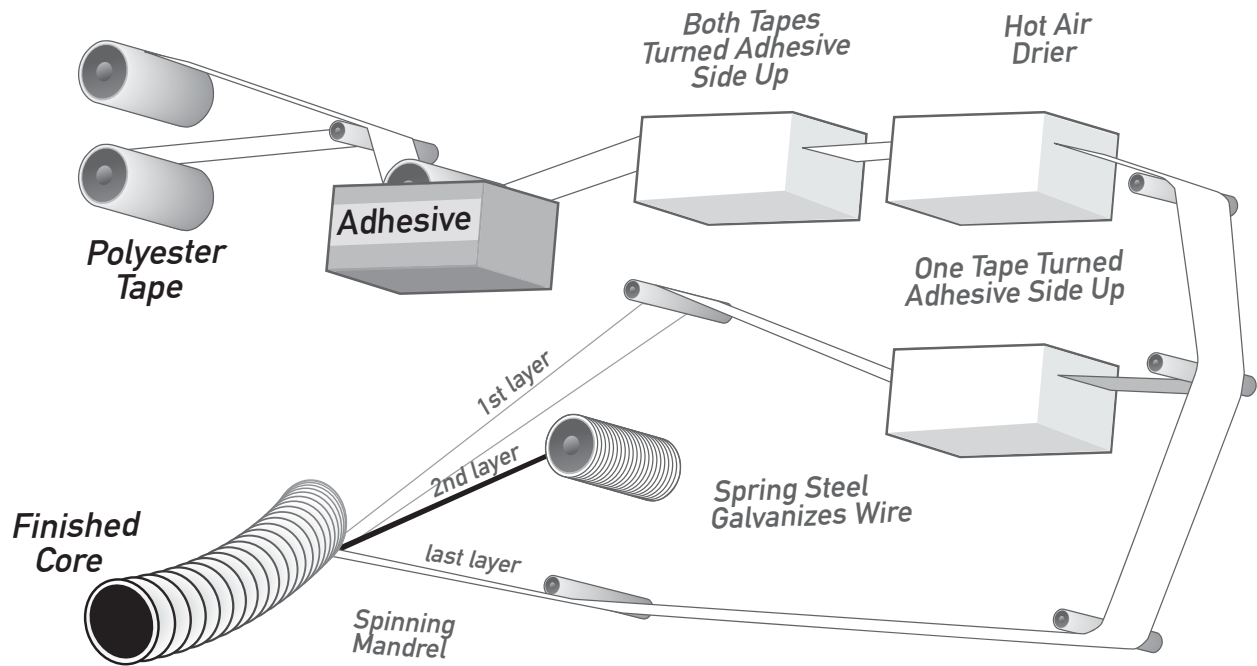

BATAFIAFLEX[®]	Insulated
Size Range	: 4 to 18 inches
Standard Length	: 5 to 10 meters
Temperature rating	: -30 to 110 c
Steel Wire	: 1.0 to 1.2 mm
Pressure Rating	: 250mm WG (+ve) 25mm WG (+ve)
Fibreglass Wool	: 1 inch to 2 inches 1 lb to 2 lb



BATAFIAFLEX[®]	Plain
Size Range	: 4 to 20 inches
Compression	: Up to 90%
Standard Length	: 10 meters
Temperature Rating	: -30 to 100 c
Steel Wire	: 1.0 to 1.2 mm
Pressure Rating	: 250mm WG (+ve) 25mm WG (-ve)